

WALL-MOUNTED TAPWARE

Wall Mounted Tap

A polished chrome wall-mounted spout with a clean tubular profile, designed for use with a separate flow-control valve or mixer.



PRODUCT INFORMATION

Product code	WW-WMT
Finish	Polished chrome
Product type	Wall-mounted spout
Approval	WRAS approved
Operating pressure	0.2-5.0 bar
Spout reach	180 mm
Flow rate	18 l/min at 3.0 bar

KEY FEATURES

- Contemporary round, tubular design.
- Suitable for low-pressure water systems.
- Sleeve slides the entire length of the spout.
- 15-year manufacturer guarantee, subject to applicable terms.

CONNECTION & SYSTEMS

- Single-hole wall installation.
- 1/2 inch x 12 mm threaded connection.
- 55 mm diameter wall backplate.
- Suitable for gravity, pumped, combination boiler and pressurised systems.


INSTALLATION NOTES

Spout only: requires a separate control valve or mixer. Confirm outlet position, basin clearance, water pressure and compatible controls before installation.

TECHNICAL REFERENCE

Dimensions & connections

Linear dimensions in mm. Connection thread in inches as marked. Do not scale.

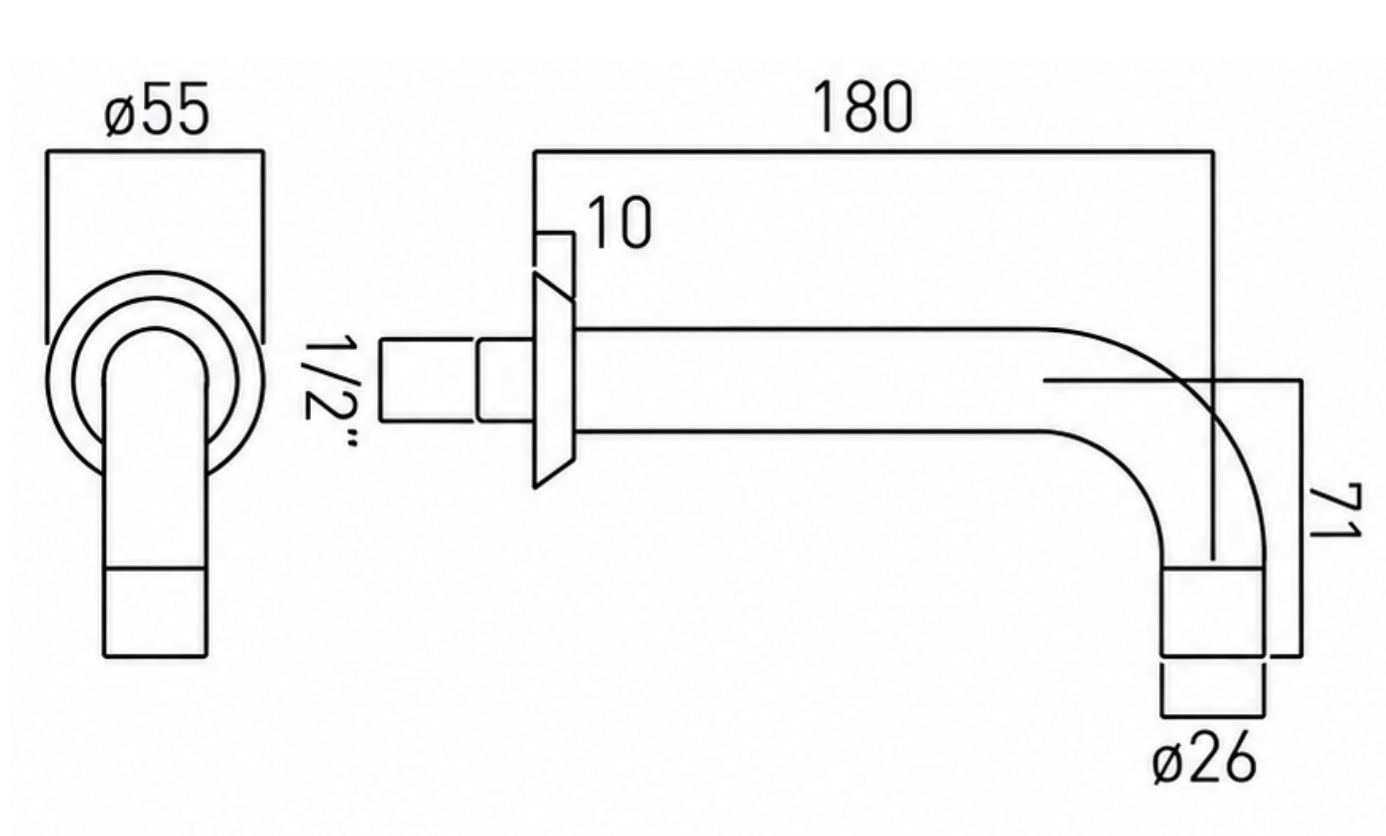

KEY DIMENSIONS

Spout reach

180 mm

Backplate diameter

55 mm

Backplate depth

10 mm

Vertical dimension shown

71 mm

Outlet diameter

26 mm

Threaded connection

1/2 inch x 12 mm

Confirm dimensions and connection requirements against the supplied product before setting out. Specifications may change without notice. Contact WuduWash for product and project enquiries.